



Hongkong Fengguan Industr Ltd
Dongguan Qianwei Mechanical Equipment Technology ltd
Email: sales@airstone.net
Contact No. : (86) 15015299001
website:www.airstone.net

➤ OIL-FREE SERIES

AIR COMPRESSORS

Silent Oil-free Air Compressor

No Oil And Low Emissions, Lower Temperature Rise, Greater Air Volume

- Inflation speed is 30% faster than an average product
- Capable of running continuously for 24 hours
- First-class energy-efficient copper wire motor

It is widely used in scientific research, medical, food, beauty and other fields that have stricter requisites on the quality of air source and air compressor.



550W Silent Oil-Free Air Compressor

PURE COPPER MOTOR , OIL-FREE AND NOISELESS

- The cylinder and piston are made of N-CRM material with nano-features that empower their wear-resistance and high temperature tolerance;
- This environment- and user-friendly compressor can be easily maintained to operate at a noise level below 70dB.



Model/

AS550*1/9L

MODEL	AS550*1/9L
Power (W)	550W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	50
Bore (mm)	
Speed (r/min)	1440
Volume (L)	9
Weight (Kg)	14
Dimensions (cm)	45*19*48

Model/

AS550*1/30L

MODEL	AS550*1/30L
Power (W)	550W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	50
Bore (mm)	
Speed (r/min)	1440
Volume (L)	30
Weight (Kg)	17.5
Dimensions (cm)	54*33*55

550W Silent Oil-Free Air Compressor

PURE COPPER MOTOR , OIL-FREE AND NOISELESS

- The cylinder and piston are made of N-CRM material with nano-features that empower their wear-resistance and high temperature tolerance;
- This environment- and user-friendly compressor can be easily maintained to operate at a noise level below 70dB.



Model/

AS550*2/50L

MODEL	AS550*2/50L
Power (W)	550W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	100
Bore (mm)	
Speed (r/min)	1440
Volume (L)	50
Weight (Kg)	24
Dimensions (cm)	65*35*71

Model/

AS550*3/70L

MODEL	AS550*1/30L
Power (W)	550W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	150
Bore (mm)	
Speed (r/min)	1440
Volume (L)	70
Weight (Kg)	70
Dimensions (cm)	86*36*71

550W Silent Oil-Free Air Compressor

PURE COPPER MOTOR , OIL-FREE AND NOISELESS



Model/

AS550*4/30L

MODEL	AS550*4/120L
Power (W)	550W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	210
Bore (mm)	
Speed (r/min)	1440
Volume (L)	120
Weight (Kg)	86
Dimensions (cm)	122*40*73




850W Silent Oil-Free Air Compressor

SPLENDID AND TRANQUIL

Oil free and low energy consumption, energy saving and environment friendly, low noise, only takes 18 seconds to inflate the air.

Fast air compressing with little waiting time, ultra-quiet, more durable, more portable, professional design makes it stable and durable, saving time and money. It can also be used for painting walls, pumping air, and decorating general household carpentry.

- This automatic lubricated cylinder and piston system is made of N-CRM material with nano-features that empower its wear-resistance and high temperature tolerance; this environment- and user-friendly compressor can be easily maintained to operate at a noise level below 70dB.
- The duration for air inflation is no more than 18 seconds. Continuous nailing with constant compressed air is an available option.
- Small size, portable, easy to carry up and down .
- National standard is met for the all-copper motor with a high-strength aluminum alloy pump body, and a double piston with a 63.7 mm cylinder bore.
- High protection, the machine and core components are well shielded (from other/external objects).

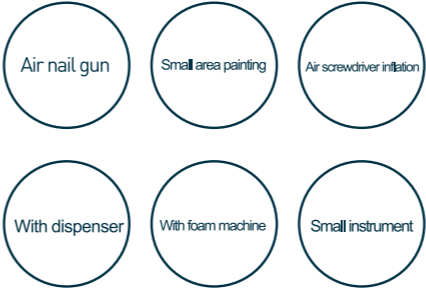

Model/

850W NAILER KING

MODEL	850W
Power (W)	850
Rated Pressure (Mpa)	0.8
Displacement (L/min)	60
Bore (mm)	Φ63.7x2
Speed (r/min)	1420
Volume (L)	6
Weight (Kg)	17.6
Dimensions (cm)	38.5x37x32

Control cabinet

Incorporating modern electronic technology with delayed start and delayed stop functions for effectively protecting the motor from burning and keeping the motor output Stabler.



Shockproof pressure gauge
Shock resistant



SPLENDID AND TRANQUIL

- The cylinder and piston are made of N-CRM material with nano-features that empower their wear-resistance and high temperature tolerance;
- This environment- and user-friendly compressor can be easily maintained to operate at a noise level below 70dB.



Model/

AS750*1/30L

MODEL	AS750*1/30L
Power (W)	750W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	80
Bore (mm)	
Speed (r/min)	1440
Volume (L)	30
Weight (Kg)	18
Dimensions (cm)	54*33*57

Model/

AS750*2/50L

MODEL	AS750*2/50L
Power (W)	750W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	160
Bore (mm)	
Speed (r/min)	1440
Volume (L)	50
Weight (Kg)	32.5
Dimensions (cm)	65*35*72

SPLENDID AND TRANQUIL

- The cylinder and piston are made of N-CRM material with nano-features that empower their wear-resistance and high temperature tolerance;
- This environment- and user-friendly compressor can be easily maintained to operate at a noise level below 70dB.



Model/

AS750*3/70L

MODEL	AS750*3/70L
Power (W)	750W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	230
Bore (mm)	
Speed (r/min)	1440
Volume (L)	70
Weight (Kg)	72
Dimensions (cm)	86*36*73

Model/

AS750*4/120L

MODEL	AS750*4/120L
Power (W)	750W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	310
Bore (mm)	
Speed (r/min)	1440
Volume (L)	120
Weight (Kg)	88
Dimensions (cm)	122*40*74

1100W Silent Oil-Free Air Compressor

SPLENDID AND TRANQUIL

- The cylinder and piston are made of N-CRM material with nano-features that empower their wear-resistance and high temperature tolerance;
- This environment- and user-friendly compressor can be easily maintained to operate at a noise level below 70dB.



Model/

AS1100*1/40L

MODEL	AS1100*1/40L
Power (W)	1100W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	110
Bore (mm)	
Speed (r/min)	1440
Volume (L)	40
Weight (Kg)	30
Dimensions (cm)	61*37*67

Model/

AS1100*2/70L

MODEL	AS1100*2/70L
Power (W)	1100W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	220
Bore (mm)	
Speed (r/min)	1440
Volume (L)	70
Weight (Kg)	56
Dimensions (cm)	84*36*73

1100W Silent Oil-Free Air Compressor

SPLENDID AND TRANQUIL

- The cylinder and piston are made of N-CRM material with nano-features that empower their wear-resistance and high temperature tolerance;
- This environment- and user-friendly compressor can be easily maintained to operate at a noise level below 70dB.



Model/

AS1100*3/140L

MODEL	AS1100*3/140L
Power (W)	1100W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	340
Bore (mm)	
Speed (r/min)	1440
Volume (L)	140
Weight (Kg)	116
Dimensions (cm)	115*37*72

Model/

AS1100*4/160L

MODEL	AS1100*4/160L
Power (W)	1100W
Rated Pressure (Mpa)	0.8
Displacement (L/min)	480
Bore (mm)	
Speed (r/min)	1440
Volume (L)	160
Weight (Kg)	122
Dimensions (cm)	135*42*73